

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number
WO 2004/042425 A1

(51) International Patent Classification: G01V 1/18,
G10K 9/12, G01H 9/00

(21) International Application Number:
PCT/GB2003/004741

(22) International Filing Date:
4 November 2003 (04.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0226162.6 8 November 2002 (08.11.2002) GB

(71) Applicant (for all designated States except US): QINETIQ LIMITED [GB/GB]; 85 Buckingham Gate, London SW1E 6PD (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): CRICKMORE, Roger, Ian [GB/GB]; Qinetiq Limited, Winfrith Technology Centre Winfrith Newburgh, Dorchester Dorset DT2 8XJ (GB). THOMAS, Sean, Dormer [GB/GB]; Qinetiq Limited, Winfrith Technology Centre Winfrith Newburgh, Dorchester Dorset DT2 8XJ (GB). TANNER, Simon [GB/GB]; Qinetiq Limited, Winfrith Technology Centre Winfrith Newburgh, Dorchester Dorset DT2 8XJ (GB). HILL, David, John [GB/GB]; Qinetiq Limited, Winfrith

Technology Centre Winfrith Newburgh, Dorchester Dorset DT2 8XJ (GB). NASH, Philip, John [GB/GB]; Qinetiq Limited, Winfrith Technology Centre Winfrith Newburgh, Dorchester Dorset DT2 8XJ (GB).

(74) Agent: RICHARDSON, Mark; IP QinetiQ Formalities, Cody Technology Park, A4 Building, Room G016, Ively Road, Farnborough, Hampshire GU14 0LX (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

[Continued on next page]

(54) Title: FLEXTENSIONAL VIBRATION SENSOR

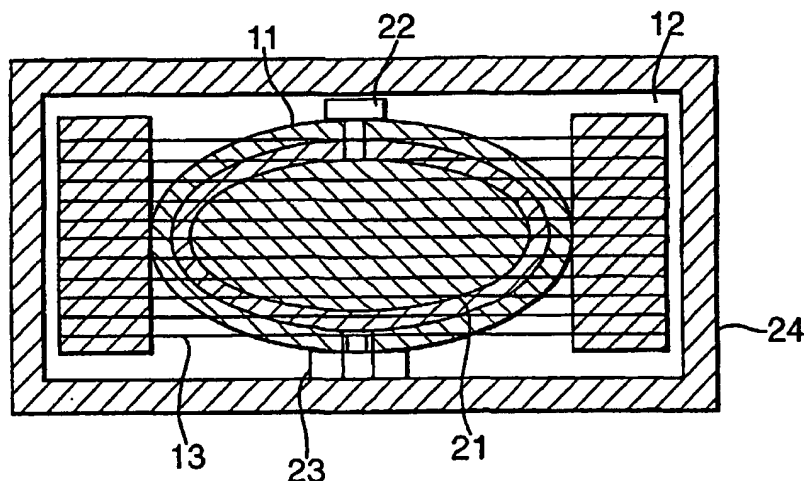

(57) Abstract: A vibration sensing device, package and system and a method of manufacturing a vibration sensing device are disclosed. The vibration sensing device comprises a body (11) whose geometry is such that it exhibits flextensional properties.



(48) Date of publication of this corrected version:

5 August 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(15) Information about Correction:

see PCT Gazette No. 32/2004 of 5 August 2004, Section II

FLEXTENSIONAL VIBRATION SENSOR

5 The present invention relates to the field of vibration sensing and in particular, in certain preferred embodiments to acceleration sensing or seismic sensing.

Current vibration sensing devices and, in particular, seismic sensors, such as geophones or accelerometers, typically use electronic transducers such as transducers
10 using the reverse piezo-electric effect. Such devices generally use a mass-spring transducer mounted in a casing, the casing being in intimate contact with the surrounding medium in which the vibrations are propagating. These devices require on-board electronic conditioning circuitry. These electronics not only need power which may have to be transmitted for long distances they also require packaging to
15 preserve them from a highly corrosive, vibrational and high pressure environment. The packaging and power requirements all lead to bulky installations. Furthermore, the electronics must also be highly reliable so that retrieval of the sensor package is not required; this means that the electronics package will be correspondingly expensive.

20 Generally, in the seismic field a plurality of seismic sensing devices are used together in an array and it is these arrays that form the bulkiest equipment in seismic sensing. Reducing the size of the individual sensing devices is therefore very important in this area.

25 A further problem with conventional electronic accelerometers that use the reverse piezo electric effect in high temperature seismic applications is that they experience reduced sensitivity when the Curie temperature is approached. This reduction in sensitivity can, in extreme cases, lead to a nullification of the piezo electric effect; this is a non-reversible process.

30

Alternatives to piezo-electric vibration sensing devices include fibre optic vibration sensing devices, these have the advantages of being light, being linked by optical fibre rather than copper cables and of using a fibre optic interferometric

measurement technique which is a highly sensitive technique. Furthermore, they are resistant to temperatures up to several hundred degrees centigrade and are therefore unaffected by temperatures they are likely to meet in down hole oil field measurements. These devices are arranged such the optical fibre of the interferometer is stressed by some means. Generally, this is done by mounting the optical fibre on some flexible mandrel or disc structure. Unfortunately, these devices suffer from being relatively insensitive for their size as the fibre is stressed via a second order effect. In order to achieve high sensitivity the devices tend to require a large mass, typically greater than 500 grams. This not only makes the device bulky and heavy it also limits the frequency range in which the sensor can be used. An example of a flexural disc fibre optic accelerometers are given below.

US-A-5317929 discloses a fibre optic accelerometer. This accelerometer comprises a pair of flexible disks mounted circumferentially on a rigid cylindrical body and having a mass mounted on a rod which extends between the disks and is centrally attached to both. An optical fibre is mounted in a spiral on the lower side of the upper disk and the upper side of the lower disk. The optical fibres are accessible at one end, having reflective portions at the other. Any variation in the length of the spiral optical fibres caused by flexure of the disks is detected and provides an indication of acceleration caused by physical displacement, shock or vibrations.

Vibration sensing devices such as accelerometers and in particular, those used in seismic sensing typically aim to measure signals such as acceleration in one direction and to be resistant to signals in other directions. The devices of the prior art suffer from problems of cross-axis sensitivity with off axis acceleration signals affecting the detected results of these accelerometers. Furthermore, many of the seismic sensing devices of the prior art are insensitive and thus, do not detect small vibrations. In an attempt to increase sensitivity some of the devices incorporate large masses, these tend to make the device heavy and unwieldy. It is desirable to produce a vibration sensor having low threshold levels in the on axis orientation and low responsivity in the off axis direction.

According to a first aspect of the invention there is provided a vibration sensing device comprising: a hollow flextensional body having a cross section that has a major and a minor axis, said flextensional body being operable to deform in response to received vibrational energy and thereby produce a variation in a predetermined property exhibited by said flextensional body in the direction of one of said major or minor axis, said flextensional body being shaped such that said variation in said predetermined property is amplified in the direction of the other of said major or minor axis; and a sensor coupled with the flextensional body and operable to detect the amplified variation indicative of received vibrational energy.

10

The use of a flextensional body to receive vibrational energy provides a system in which a variation in a property caused by vibration received by the flextensional body can be amplified by the flextensional body. This amplified property is sensed by the sensor. The properties of the flextensional body are such that comparatively small bodies and masses can be used, making it convenient to use in an array. Thus, a sensitive and convenient sensing device can be produced. Although acoustic transmitters are known which employ the flextensional principle to generate sonar waves. These transmitters are large, heavy devices being of the order of one metre high, one metre long and half a metre wide, they also carry heavy metal struts to protect them. When placed in water they are often powerful enough to make the water boil. The skilled person looking for a small, yet sensitive vibrational detector would not have thought of looking at these devices.

20

In preferred embodiments, said predetermined property comprises force, vibrational energy received along said minor axis causing deformation of said flextensional body, with a force acting along said minor axis and an amplified force acting along said major axis, said sensor being coupled to said flextensional body along said major axis to detect the amplified force.

25

This arrangement providing amplification of the vibration force that is to be detected at the sensor has been found to increase the sensitivity of the sensor significantly.

30

In other embodiments said predetermined property comprises displacement, vibrational energy received along said major axis causing displacement of said flextensional body along said major axis and an amplified displacement along said minor axis, said sensor being coupled to said flextensional body along said minor axis
5 to detect the amplified displacement.

Although an outer housing is not necessary preferably said vibration sensing device further comprises an outer housing, said vibration sensing device being
10 mounted within said outer housing.. An outer housing protects the device and can provide a suspension system which reduces cross axis sensitivity. The outer housing can be sealed and filled with a damping fluid or it may be left open to the external environment.

15 Preferably, said vibration sensing device further comprises a mass mounted on said flextensional body. A mass increases the sensitivity of the device, the vibrational force causing acceleration of the mass.

In some embodiments, said minor axis has a first and a second end, wherein
20 said sensor is mounted along said major axis of said flextensional body and said mass is mounted to said flextensional body in the proximity of said first end of said minor axis. This arrangement provides increased sensitivity due to the mass and amplification of the vibrational force due to the arrangement of the sensor, thus a particularly sensitive device is achieved.

25 With this arrangement it is preferable to mount said flextensional body to said outer housing via mounting means, said mounting means connecting a portion of said flextensional body in the proximity of said second end of said minor axis to said housing.

30 In other embodiments said major axis has a first and a second end, wherein said sensor is coupled along said minor axis of said flextensional body and said mass is

mounted to said flextensional body in the proximity of said first end of said major axis. This arrangement provides amplification of the displacement which particularly with a mass attached provides a sensitive device.

5 With this arrangement it has been found to be preferable to mount said flextensional body on said outer housing via mounting means, said mounting means connecting a portion of said flextensional body in the proximity of said second end of said major axis to said housing.

10 Although the flextensional body can be formed of any material exhibiting appropriate properties and in particular stiffness, preferably, said flextensional body is formed of metal. Metal is a robust material that is sensitive to vibrational energy and exhibits suitable properties for transmitting vibrational energy to a sensor mounted upon it.

15 Preferably, said flextensional body comprises a tube having an elliptical cross section. An elliptical shape has been found to be particularly effective as a vibration sensor. It is a convenient shape for mounting the sensor on, and amplification of a received signal is both pronounced and mathematically easy to predict. It has also
20 been found that a vibration sensor having an elliptical geometry can be made conveniently small and yet still be sensitive to vibration across a range of frequencies.

 Although the mass may be mounted on the outside surface of the flextensional body, preferably, it is mounted within said flextensional body. This arrangement
25 provides a compact device. This is an advantage in many applications such as in seismic sensing where a large number of these devices will be used together in an array.

 Advantageously, said flextensional body comprises an outer wall, said outer
30 wall having a substantially uniform thickness. Flextensional properties of a body depend to some extent on the wall thickness of the body being substantially constant.

In preferred embodiments, said major axis of said flextensional body is between 10 mm and 30mm, preferably, 22mm and said minor axis of said flextensional body is between 5mm and 20mm preferably 11mm.

5 The dimensions of the flextensional sensors are small making the devices both small and light and suitable for mounting in an array. This is very different to flextensional transmitters which are large, heavy, unwieldy devices that are generally used singly.

10 Although the vibration sensing devices can have a number of different forms in some embodiments said vibration sensing device comprises an accelerometer.

In some embodiments said sensor comprises a strain sensor.

15 In preferred embodiments said sensor comprises an optical fibre coupled to said flextensional body such that deformation of said flextensional body produces a strain in said optical fibre which imposes a variation in at least one predetermined property of an optical signal transmitted through said optical fibre, said optical fibre being arranged such that at least one end is accessible for optical coupling to an optical
20 device comprising a detector for detecting said changes in said at least one predetermined property of said transmitted optical signal.

Optical fibre sensors are extremely sensitive. Furthermore, they are small and light and do not require electrical power. Additionally, the fibre can be used as both
25 the means to sense the signal and to transmit the data back to the interrogation unit. This means that there is no need to house any electronics in the deployed part of any sensing array. This leads to significant reductions in the size, complexity and hence cost of the system. Optical fibre sensors are also generally resistant to high temperatures and corrosive environments and as such are particularly well adapted for
30 use in seismic applications.

Preferably, said optical fibre is coupled under stress to said flextensional body. By pre-stressing the optical fibre the net force acting on the fibre will generally remain either compressive or extensional. This helps keep the sensor in the linear displacement regime and avoids non-linearities in the detection region.

5

In some embodiments, said vibration sensing device further comprises blocks mounted on the outer surface of said flextensional body at either end of said minor axis, said optical fibre sensor comprising an optical fibre coil, said optical fibre coil being coupled to said flextensional body by being wound around said blocks, whereas
10 in others said vibration sensing device further comprises blocks mounted on the outer surface of said flextensional body at either end of said major axis, said optical fibre sensor being coupled to said flextensional body by being wound around said blocks.

15 The blocks provide a convenient surface for the optical fibre to be mounted upon. Furthermore, their properties can be chosen to provide a surface that is not rough or sharp and thus will not damage the fibre. Additionally they provide an increased radius for the fibre to be wrapped around, this increases the length of sensing fibre that can be used thereby increasing its sensitivity. The blocks also increase the
20 radius of the curve around which the fibre is wrapped, this decreases light loss which may occur if the bend in the curve is too sharp. Furthermore, wrapping an optical fibre directly on the flextensional body may inhibit its flexing properties.

Preferably, said blocks are formed of metal. Metal is a robust temperature
25 resistant material. Furthermore, the material properties of metal are such that the physical response of the device will be relatively unaffected by the changes in temperature which may be encountered in some applications such as seismic applications. It is generally found to be appropriate to have blocks made from the same material as the flextensional body.

30

Advantageously, said optical fibre is coupled to said flextensional body such that both ends of said optical fibre are accessible for optical coupling to further optical

devices. Many devices of the prior art only have one end of any optical fibre sensor accessible for coupling to external devices, the other end being located well within the device and having a reflective portion. Thus, any signal travelling through the fibre from the accessible end, is reflected back through the fibre by the reflective portion, exiting the fibre at the end that it entered. In the device according to an embodiment of our invention, the arrangement of the device is such that both ends of the optical fibre are accessible for external connection. Thus, a signal entering the device via one end of the fibre can exit it via the other end; this makes the device particularly adaptable for configuration into an array architecture. Optical fibre strain sensors are also particularly suitable for use in an array architecture with a high degree of multiplexing using both Dense Wavelength Division Multiplexing (DWDM) and Time Division Multiplexing (TDM) being possible with these sensors.

A second aspect of the present invention comprises a vibration sensing package, comprising three vibration sensing devices according to a first aspect of the present invention, wherein each of said three vibration sensing devices have a sensor coupled along an axis of said sensing device, said three vibration sensing devices being mounted such that said axes along which respective sensors are coupled are arranged orthogonally to one another.

Each of said individual vibration sensing devices is sensitive to vibrations along a particular axis. Mounting three such sensing devices orthogonally to each other provides a sensing package that is sensitive to vibrations in any direction. Such a package can detect vibrations in three dimensions and provide a directional component to the vibrations that are sensed.

In preferred embodiments said package further comprising a hydrophone. A hydrophone within the package provides a package that can measure both the pressure and the shear wave in a vibration sensing system.

A third aspect of the present invention provides a vibration sensing system, comprising: a first plurality of vibration sensing devices according to a first aspect of

the present invention; an electromagnetic radiation source and an electromagnetic radiation detector; said optical fibres of said first plurality of vibration sensing devices being arranged in optical communication with each other and with said electromagnetic radiation source and detector; said electromagnetic radiation source
5 being operable to transmit an optical signal into said optical fibres of said plurality of vibration sensing devices; and said electromagnetic radiation detector being arranged to receive electromagnetic radiation output from said plurality of vibration sensing devices and to detect a variation in at least one predetermined property of said output optical signal.

10

The vibration sensing devices of the present invention being small and light and having both ends of the optical fibre available are particularly well adapted to mounting in an array in a vibration sensing system. This makes them particularly suitable for use as seismic sensing devices.

15

In some embodiments the vibration sensing devices are arranged optically in series, whereas in others they may be arranged in parallel or in both parallel and series.

A further aspect of the present invention provides, a method of detecting
20 vibrations comprising: coupling a sensor to a hollow flextensional body having a cross section that has a major and a minor axis, said flextensional body being operable to deform in response to received vibrational energy and thereby produce a variation in a predetermined property exhibited by said flextensional body in the direction of one of said major or minor axis, said flextensional body being shaped such that said variation
25 in a predetermined property is amplified in the direction of the other of said major or minor axis; and placing said flextensional body in an environment where vibrational energy is to be detected; and detecting the amplified variation indicative of received vibrational energy with said sensor.

30

A still further aspect of the present invention provides a method of manufacturing a vibration sensing device according to a first aspect of the present invention comprising the steps of: (i) mounting blocks on an outside surface of said

flextensional body at either end of said minor or said major axis: (ii) holding said flextensional body within chucks adapted to pass around and hold the outer edges of said blocks within an optical coil winding apparatus; (iii) passing an optical fibre through a reservoir of resin, such that a layer of resin coats said optical fibre, said
5 optical fibre exiting said reservoir of resin via a needle, said needle being operable to position said optical fibre above said flextensional body held within said chucks and being arranged to allow a suitable amount of resin to coat said fibre; (iv) rotating said flextensional body such that said optical fibre is wound about said blocks mounted at either end of an axis of said flextensional body to form a coil of optical fibre wound
10 around said axis, said coil being attached to said blocks by said resin and at least one end of said optical fibre being accessible for connection to external optical components.

The manufacture of these vibration sensing devices involves the direct winding
15 of the coil onto the flextensional body. This is done using an apparatus that has been adapted to hold the flextensional body. The needle provides an excellent means for positioning the fibre accurately for mounting on the formers at either end of the flextensional body and for supplying the correct amount of resin.

20 Preferably, said step (iv) of winding said optical fibre is performed such that coil is wound under tension. Winding the coil under tension means that the flextensional body is pre-stressed. Thus, when it experiences vibrational forces acting in different directions this does not cause both compressional and extensional forces to act upon the ellipse. Rather in normal operation the net force acting along the sensing
25 axis of the device remains compressive or extensional and within the linear displacement regime. This avoids signal distortion.

In preferred embodiments the method comprises a further step of continuing to rotate said flextensional body after winding said coil until said resin has set. This
30 inhibits any drooping of the coil as it sets.

A yet further aspect of the present invention comprises the use of a flextensional body to detect vibrations. The shape function of flextensional bodies provides amplification of some signals and thereby provides a sensitive way of detecting vibrations.

5

Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 shows a plurality of shapes that exhibit a flextensional property;

10

Figure 2A shows a schematic side view of the core of a vibration sensing device according to an embodiment of the present invention wherein the sensing coil is coupled along the major axis of the device;

Figure 2B shows the core of Figure 2A with its dimensions in mm;

15

Figure 3 shows a top view of an optical coil wound around the vibration sensing device of Figure 1;

Figure 4 shows a vibration sensing device according to an embodiment of the present invention comprising the core illustrated in Figure 2A and 2B mounted in a housing;

20

Figure 5 shows a schematic sectional view of the core of a vibration sensing device according to another embodiment of the present invention wherein the sensing coil is coupled along the minor axis of the device;

Figure 6 schematically shows a plurality of vibration sensing devices arranged in series;

Figure 7 shows a plurality of optical fibres arranged in parallel and in series;

25

Figure 8 shows three vibration sensing devices according to an embodiment of the present invention mounted orthogonally to each other as a vibration sensing package; and

Figure 9 shows an apparatus used to wet wind the coils.

30

Figure 1 shows several examples of shapes whose geometry is such that they exhibit a flextensional property. Arrow B shows the direction of the major axis of a cross section of these shapes, while arrow C shows the direction of the minor axis.

The flextensional principle can be defined as the action of a shell, wherein the shell is put into flexure in response to an extensional and/ or compressional force. If the shell exhibits an extension or compression along one of the major or minor axis of a cross section of the shell, then this causes flexure which produces a movement along the other axis. Depending on which axis the extension or compression occurs along, either the motion or the force is amplified through the mechanical advantage generated by the shape function. In the case of a flextensional acoustic transmitter the sound radiating surface of the shell is put into *flexure* when mechanically driven by an *extensional* vibration of a drive motor. In the present device wherein shapes having this geometry are used as receivers, the method of operation is reversed. The surfaces which are used to emit the acoustic signal into the surrounding medium are now used to receive the signal which causes a vibrational extension and/or compression along one axis and results in flexing of the body and movement along the other axis. IN the case of a receiver the driver motor is replaced with a sensor which senses this flexing.

15

Figure 2A illustrates the core of a vibration sensing device according to an embodiment of the present invention and shows a flextensional elliptical shell 11 having end pieces or formers 12. The formers are mounted on the elliptical shell at the ends of the major axis of the shell in the plane containing the major axis normal to the minor axis. An optical fibre sensing coil 13 is wound around the formers and elliptical shell along the major axis of the shell. The formers 12 have curved edges (see Figure 3) and thus allow the fibre coil to be wound around the ellipse without too much strain and associated problems of fibre breakage. The formers 12 also provide the optical fibre with a larger radius around which to bend than would the ellipse edge by itself. A larger bend radius of the optical fibre reduces optical losses. Furthermore, direct winding of the optical coil on the flextensional body would inhibit its deformation and thereby reduce the sensitivity of the device. A mass (shown in Figure 4 is mounted to the flextensional elliptical shell 11. The mass is between 40 and 100 grams, typically between 60 to 80 grams.

30

Figure 2B shows the same core in perspective. As can be seen the flextensional elliptical shell 11 is 22mm long and 12 mm wide. The formers 12 are

5mm long and 11mm tall. These are preferred dimensions and other dimensions are also envisaged.

The elliptical shell is preferably formed from metal with the end pieces or
5 formers being made of metal. The material properties of the metal are not greatly affected by changes in temperature particularly by the range of temperatures that are expected to be encountered in seismic applications and thus such temperature variations should not appreciably affect the physical response of the device.

10 In use, when a component of acceleration occurs parallel to the minor axis (arrow A), the force required to accelerate the inertial mass (shown in Figure 4) generates a strain along the minor axis, and a strain of the opposite sense will be set up along the major axis. The use of the elliptical shell in this arrangement means that the force that is applied to the optical fibre sensor (or other sensor in other embodiments)
15 mounted along the major axis is greater than the force that would be applied to the sensor if it was mounted along the minor axis, and this leads to an increase in the device's sensitivity. In other words the force is amplified through the mechanical advantage generated by the shape function of the elliptical shell.

20 Figure 4 shows a vibration sensing device according to an embodiment of the present invention comprising the core illustrated in Figure 2, having an elliptical shell (11), coil (13), outer casing (24), and an inertial mass (21) mounted within the elliptical shell. The elliptical shell has holes at either end of the minor axis. A bolt (22) passes through one of these holes and into the inertial mass (21) connecting the
25 inertial mass to one end of the minor axis. The other hole is used to attach the other end of the minor axis of the shell (11) to the rigid outer casing (24). A washer (23) is used to lift the shell (11) away from the case so that the end pieces (12) do not foul on the case (24). In some embodiments, rather than being attached to an outer casing the device is attached via the hole in the minor axis to the structure whose acceleration is
30 being sensed.

Figure 5 illustrates the core of a vibration sensing device according to a further embodiment of the present invention and shows a flextensional elliptical shell (11) having end pieces or formers (12). In this embodiment the formers are mounted on the elliptical shell at the ends of the minor axis of the shell in the plane containing the
5 minor axis normal to the major axis. An optical fibre sensing coil (13) is wound around the formers and elliptical shell along the minor axis of the shell. The formers (12) have curved edges and thus allow the fibre coil to be wound around the ellipse without too much strain and associated problems with breakage of the fibre. The formers 12 also provide the optical fibre with a larger radius around which to bend
10 than would the ellipse by itself. A larger bend radius of the optical fibre reduces optical losses.

As in the previous embodiment the elliptical shell is preferably formed from metal with the end pieces or formers being made of metal.

15

In this embodiment, the vibration sensor senses motion in the direction of the major axis of the ellipse (arrow A) by utilising the shape function of the geometry of the shell to change the orientation of the vibration and to achieve some mechanical amplification. In effect the force required to accelerate the inertial mass generates a
20 strain along the major axis, and a strain of the opposite sense will be set up along the minor axis. The use of the elliptical shell in this arrangement means that the displacement that is applied to the optical fibre sensor (or other sensor in other embodiments) mounted along the minor axis is greater than the displacement that would be applied to the sensor if it was mounted along the major axis. In other words
25 the displacement has been amplified through the mechanical advantage generated by the shape function of the elliptical shell.

In both embodiments vibrational forces or acceleration forces parallel to the minor axis but acting in different directions can cause both compressional and
30 extensional forces to act upon the minor axis of the ellipse. These forces are in turn transferred as compression or tension to the fibre. This is undesirable as it may lead to non-linearities in the response that can cause signal distortion. To avoid distortions it

has been found to be preferable to pre-stress the device so that in normal operation the net force acting along the minor axis of the device must remain compressive or extensional. To ensure low distortion when the device is excited, it must remain in the linear displacement regime. To this end the optical fibre coils are wound under stress.

5

Given that individual sensors are sensitive to vibrations parallel to a particular axis, three sensors mounted orthogonally with each other, so that vibrations in each of three dimensions can be detected are often mounted together as a unit. Further, multiplexing can then occur with a plurality of these units being mounted together in an array. In some devices a hydrophone is also mounted within the package. This provides information on the shear wave.

Figures 6 and 7 illustrate possible ways of multiplexing the individual vibration sensing devices to form an array. The multiplexing regimes used are Time Division Multiplexing (TDM) in the array of Figure 6 and both Time Division Multiplexing and Dense Wavelength Division Multiplexing (DWDM) in the architecture of Figure 7.

Figure 6 shows the individual optical sensing coils 63 arranged in series. The coils 63 are bracketed by couplers 61. Attached to one of the outputs of the coupler 61 is a mirror 62, the other output is connected to a sensing coil 63. These couplers 61 and mirrors 62 are so arranged that there is a reflector before and after each coil so that a pair of light pulses contained within the fibre are reflected from the mirrors 62. The first pulse is split by the first coupler 61 a portion of the pulse is reflected back and the rest is directed into the coil 63, this pulse is then split by the next coupler 61 a portion of the light is then reflected back from the mirror. At the same time the second pulse is being split by the first coupler 61 and one portion of the light is reflected back. The lengths of the fibres and the timing of the pulses are selected such that the second pulse returning from the first mirror and the first pulse returning from the second mirror coincide on the receiver at the same time. Changes in phase between the two signals can be used to detect changes in length and/or refractive index of the coil resulting from strains imposed on the coil.

Figure 7 shows a plurality of these serially connected strings of vibration sensing devices or seismic sensing devices connected in parallel. The strings of seismic sensing devices are multiplexed and connected in parallel, using DWDM architecture. Items 71 are Multiplex / Demultiplex units these isolate a single
5 frequency from the source and direct it to the relevant Seismic sensing device string and then multiplex the signal back into the signal fibre.

Figure 8 shows three of the vibration sensing device arranged orthogonally to each other. These three devices may be mounted in a housing with a hydrophone to
10 form a vibration sensing package. This package can then be used to provide information on both magnitude and direction of any received vibration.

Figure 9 shows an apparatus used to wet wind the coils 13 around the flextensional body. When manufacturing the vibration sensing device according to an
15 embodiment of the present invention the basic elliptical shell is modified to make it suitable for mounting an optical fibre on without causing the fibre to break. End or cheek pieces are added to each side (as shown in Figures 2 and 5), these are plates which extend the entire length of the coil and are the same width (or length depending on embodiment) as the elliptical shell. This produces an interesting shape that needs to
20 be held by chucks in a wet winding machine to wind the optical fibre coil onto the device. Thus, special holders 43 are made to accept the ellipse 11 and end pieces 12. These holders comprise a recess 44 into which the end pieces 12 fit. This recess serves to both hold the flextensional body and to provide keepers to prevent the fibre escaping during the winding process. The holder comprises a broad spindle 46 that
25 serves as a support around which the fly leads from the device can be wrapped during manufacture to keep them safe.

When winding the coil, the flextensional body is mounted and then clamped between the holders, one of which is mounted onto the tailstock of a winding machine.
30 A length of fibre is initially drawn through the bath and the needle prior to the bath being filled with resin. This length is then passed once around the flextensional body 11, 12 and secured to the winding mandrel on spindle 46. The bath is then filled with

fluid epoxy resin and hardener mixture or other similar bonding material and winding is commenced. The fibre 57 passes through the needle 55 which is used to position the fibre in the correct position and to strip the excess resin from the fibre 57. Item 54 holds the needle rigidly in position relative to the bath 56 and the positioning arm of the precision winding machine.

When 20m of fibre has been wound onto the flextensional body 11, 12, the winding is stopped. The bath is then emptied and a further fly lead is then drawn through and secured to the spindle 46. To prevent any sagging of the composite coil the device is rotated until the resin has gelled. Depending on the type of resin used a post cure may be advised.

As the process and arrangement of the coil is such that the fibre is free at both ends a number of the vibration sensors can be wound in one go. For example, the three components for the three axis measurements can be wound in one process. This not only reduces the construction time, it may also reduce optical losses between devices as it reduces the need for splicing.

The winding machine has an integral tension controller which adjusts and maintains the tension applied to the fibre as it is wound. As explained above the coil is wound under tension and it is important that a relatively constant tension is applied throughout the coil. Using the needle 55 positioning system it is not necessary to remove any excess resin as only the correct amount of resin is left on the fibre 57.

Once the epoxy resin has cured then the device can be assembled from the chosen parts. Care must be taken to not damage the fibre 57 as it exits the vibration sensing device.

The Optical Fibre 57 used in an embodiment of this invention has a 6 micron core with an 80 micron cladding. However, other types of optical fibre could be used. The epoxy resin used must have a high modulus to transfer the strains from the flextensional body 11, 12 to the fibre 57.

The optical vibration sensing devices of embodiments of the present invention are particularly well suited to assembly into an array, individual signals being isolated with the use of time division or wavelength division multiplexing. In particular, the
5 accessibility of both ends of the optical fibre in individual vibration sensing devices aids in this array architecture.

In summary, embodiments of this invention provide a highly sensitive seismic sensing device which exhibits a low cross-axis sensitivity and can be easily
10 multiplexed using both time division and dense wavelength division multiplexing.

CLAIMS

- 5 1. A vibration sensing device comprising:
a hollow flextensional body having a cross section that has a major and a minor axis,
said flextensional body being operable to deform in response to received vibrational
energy and thereby produce a variation in a predetermined property exhibited by said
body in the direction of one of said major or minor axis, said flextensional body being
10 shaped such that said variation in said predetermined property is amplified in the
direction of the other of said major or minor axis; and
a sensor coupled with the flextensional body and operable to detect the amplified
variation indicative of received vibrational energy.
- 15 2. A vibration sensing device according to claim 1, wherein said predetermined
property comprises force, vibrational energy received along said minor axis causing
deformation of said flextensional body, with a force acting along said minor axis and
an amplified force acting along said major axis, said sensor being coupled to said
flextensional body along said major axis to detect the amplified force.
- 20 3. A vibration sensing device according to claim 1, wherein said predetermined
property comprises displacement, vibrational energy received along said major axis
causing displacement of said flextensional body along said major axis and an
amplified displacement along said minor axis, said sensor being coupled to said
25 flextensional body along said minor axis to detect the amplified displacement.
4. A vibration sensing device according to any of the preceding claims, said
vibration sensing device further comprising an outer housing for housing said vibration
sensing device.

5. A vibration sensing device according to any of the preceding claims, said vibration sensing device further comprising a mass mounted on said flextensional body.

5 6. A vibration sensing device according to claim 5 when dependent on claim 2, wherein said minor axis has a first and a second end, said mass being mounted to said flextensional body in the proximity of said first end of said minor axis.

7. A vibration sensing device according to claim 6 when dependent on claim 4,
10 wherein said flextensional body is mounted to said outer housing via mounting means, said mounting means connecting a portion of said flextensional body in the proximity of said second end of said minor axis to said housing.

8. A vibration sensing device according to claim 5 when dependent on claim 3,
15 said major axis having a first and a second end, and said mass is mounted to said flextensional body in the proximity of said first end of said major axis.

9. A vibration sensing device according to claim 8 when dependent on claim 4,
wherein said flextensional body is mounted to said outer housing via mounting means,
20 said mounting means connecting a portion of said flextensional body in the proximity of said second end of said major axis to said housing.

10 A vibration sensing device according to any of the preceding claims wherein said flextensional body is formed of metal.

25

11. A vibration sensing device according to any of the preceding claims wherein said flextensional body comprises a tube with an elliptical cross-section.

12. A vibration sensing device according to any preceding claim, wherein said
30 mass is mounted within said hollow flextensional body.

13. A vibration sensing device according to any preceding claim, wherein said flextensional body comprises an outer wall, said outer wall having a substantially uniform thickness.
- 5 14. A vibration sensing device according to any preceding claim, wherein said major axis of said flextensional body is between 10 mm and 30mm long.
15. A vibration sensing device according to claim 14, wherein said major axis is of said flextensional body is substantially 22mm long.
- 10 16. A vibration sensing device according to any preceding claim, wherein said minor axis of said flextensional body is between 5mm and 20mm long.
17. A vibration sensing device according to claim 16, wherein said minor axis of
15 said flextensional body is substantially 11mm long.
18. A vibration sensing device according to any of the preceding claims, wherein said vibration sensing device comprises an accelerometer.
- 20 19. A vibration sensing device according to any preceding claim, wherein said sensor comprises a strain sensor
20. A vibration sensing device according to any preceding claim, wherein said
25 sensor comprises an optical fibre coupled to said flextensional body such that deformation of said flextensional body produces a strain in said optical fibre which imposes a variation in at least one predetermined property of an optical signal transmitted through said optical fibre, said optical fibre being arranged such that at least one end is accessible for optical coupling to an optical device comprising a
30 detector for detecting said changes in said at least one predetermined property of said transmitted optical signal.

21. A vibration sensing device according to claim 20, wherein said optical fibre is coupled under stress to said flextensional body.
22. A vibration sensing device according to claim 20 or 21 when dependent on
5 claim 3, said vibration sensing device comprising blocks mounted on the outer surface of said flextensional body at either end of said minor axis, said optical fibre sensor comprising an optical fibre coil, said optical fibre coil being coupled to said flextensional body by being wound around said blocks.
- 10 23. A vibration sensing device according to claim 20 or 21 when dependent on claim 2, wherein said vibration sensing device comprises blocks mounted on the outer surface of said flextensional body at either end of said major axis, said optical fibre sensor being coupled to said flextensional body by being wound around said blocks.
- 15 24. A vibration sensing device according to any of claims 22 or 23 wherein said blocks are formed of metal.
25. A vibration sensing device according to any one of claims 20 to 24, wherein said optical fibre is coupled to said flextensional body such that both ends of said
20 optical fibre are accessible for optical coupling to further optical devices.
26. A vibration sensing package, comprising three vibration sensing devices according to any of the preceding claims, each of said three vibration sensing devices having a sensor coupled along an axis of said sensing device, said three vibration
25 sensing devices being mounted such that said axes along which respective sensors are coupled are arranged orthogonally to one another.
27. A vibration sensing package according to claim 26, said package further comprising a hydrophone.
- 30 28. A vibration sensing system, comprising:
a first plurality of vibration sensing devices according to any one of claims 20 to 25;

an electromagnetic radiation source and an electromagnetic radiation detector;
said optical fibres of said first plurality of vibration sensing devices being arranged in
optical communication with each other and with said electromagnetic radiation source
and detector;

- 5 said electromagnetic radiation source being operable to transmit an optical signal into
said optical fibres of said plurality of vibration sensing devices; and
said electromagnetic radiation detector being arranged to receive electromagnetic
radiation output from said plurality of vibration sensing devices and to detect a
variation in at least one predetermined property of said output optical signal.

10

29. A vibration sensing system according to claim 28, where said first plurality of
vibration sensing devices are arranged optically in series.

30. A vibration sensing system according to any one of claim 28 or 29, said
15 sensing system further comprising a plurality of partial radiation reflectors, said
plurality of partial radiation reflectors being arranged before and after each of said
plurality of vibration sensing devices; wherein
said electromagnetic radiation source is operable to transmit a plurality of pulses into
said first plurality of vibration sensing devices such that a pulse of radiation that is
20 reflected back through one vibration sensing device by a reflector immediately after
said vibration sensing device reaches said electromagnetic radiation detector at the
same time as, and interacts with, a subsequent pulse reflected by a reflector
immediately before said one vibration sensing device;
said variations in said at least one predetermined property of said optical signal
25 detected by said electromagnetic radiation detector being variations in phase.

31. A vibration sensing system according to claim 30, further comprising a signal
processor including a time division demultiplexer, said signal processor being operable
to process signals produced by said electromagnetic detector in response to said
30 variations in phase and to isolate signals from individual vibration sensing devices
using said time division demultiplexer.

32. A vibration sensing system according to any one of claims 29 to 31, further comprising:

a second plurality of vibration sensing devices arranged optically in series with each other, said second plurality of vibration sensing devices being arranged optically in

5 parallel with said first plurality of vibration sensing devices; and

a first and second wavelength multiplex/demultiplex unit operable to isolate a single frequency; wherein

said electromagnetic source is operable to produce pulses of radiation at first and second frequencies and said first and second wavelength multiplex/demultiplex units

10 are arranged such that pulses of said first frequency are transmitted from said source to said first plurality of vibration sensing devices and pulses of said second frequency are transmitted from said source to said second plurality of vibration sensing devices.

33. A vibration sensing system according to claim 32, further comprising

15 at least one further plurality of vibration sensing devices and at least one further wavelength multiplex/demultiplex unit, said at least one further plurality of vibration sensing devices being arranged optically in parallel with said first and said second plurality of vibration sensing devices; wherein

said electromagnetic source is operable to produce pulses of radiation at first, second

20 and at least one further frequency and said at least one further multiplex/demultiplex unit is arranged such that pulses of said at least one further frequency are transmitted from said source to said at least one further plurality of vibration sensing devices.

34. A vibration sensing system according to claim 31 wherein said first plurality of
25 vibration sensing devices are arranged optically in parallel.

35. A vibration sensing system according to any one of claims 28 to 34, comprising a plurality of vibration sensing packages according to claims 26 or 27 when dependent on any one of claims 20 to 25.

30

36. A method of detecting vibrations comprising:

coupling a sensor to a hollow flextensional body having a cross section that has a major and a minor axis, said flextensional body being operable to deform in response to received vibrational energy and thereby produce a variation in a predetermined property exhibited by said flextensional body in the direction of one of said major or
5 minor axis, said flextensional body being shaped such that said variation in a predetermined property is amplified in the direction of the other of said major or minor axis; and
placing said flextensional body in an environment where vibrational energy is to be detected; and
10 detecting the amplified variation indicative of received vibrational energy with said sensor.

37. A method of detecting vibrations according to claim 36, wherein said predetermined property comprises force, said flextensional body being placed in an
15 environment to receive vibrational energy along its minor axis, which causes deformation of said flextensional body with a force acting along the minor axis and an amplified force acting along the major axis, said sensor being coupled to the flextensional body along the major axis to detect the amplified force.

20 38. A method of detecting vibrations according to claim 36, wherein said predetermined property comprises displacement, said flextensional body being placed in an environment to receive vibrational energy along its major axis which causes displacement of said flextensional body along said major axis and an amplified displacement along said minor axis, said sensor being coupled to said flextensional
25 body along said minor axis to detect the amplified displacement.

39. A method of detecting vibrations further comprising mounting a mass to said flextensional body.

30 40. A method of detecting vibrations according to claim 37 wherein mass is mounted to a face of said flextensional body in the proximity of one end of said minor axis, vibrations parallel to the minor axis being detected

41. A method of detecting vibrations according to claim 38, and said mass is mounted to a face of said flextensional body in the proximity of one end of said major axis, vibrations parallel to the major axis being detected.

5

42. A method of detecting vibrations according to any one of claims 36 to 41, further comprising mounting a plurality of said flextensional bodies in an array and placing said array in an environment where vibrations are to be detected.

10 43. A method of detecting vibrations according to claim 37 or 38, comprising mounting three of said flextensional bodies together in a package such that said axes along which each respective sensor is coupled are arranged orthogonally to one another and placing said package in an environment where vibrations are to be detected.

15

44. A method of manufacturing a vibration sensing device according to any one of claims 20 to 25 comprising the steps of

(i) mounting blocks on an outside surface of said flextensional body at either end of said minor or said major axis:

20 (ii) holding said flextensional body within chucks adapted to pass around and hold the outer edges of said blocks within an optical coil winding apparatus;

(iii) passing an optical fibre through a reservoir of resin, such that a layer of resin coats said optical fibre, said optical fibre exiting said reservoir of resin via a needle, said needle being operable to position said optical fibre above said flextensional body held
25 within said chucks and being arranged to allow a suitable amount of resin to coat said fibre;

(iv) rotating said flextensional body such that said optical fibre is wound about said blocks mounted at either end of an axis of said flextensional body to form a coil of optical fibre wound around said axis, said coil being attached to said blocks by said
30 resin and at least one end of said optical fibre being accessible for connection to external optical components.

45. A method of manufacturing a vibration sensing device according to claim 44, wherein step (iv) is performed such that both ends of said optical fibre are accessible for connection to external optical components.
- 5 46. A method of manufacturing a vibration sensing device according to claim 44 or 45, wherein said step (iv) of winding said optical fibre is performed such that coil is wound under tension.
- 10 47. A method of manufacturing a vibration sensing device according to any one of claims 44 to 46, comprising a further step of continuing to rotate said flextensional body after winding said coil until said resin has set.
- 15 48. A vibration sensing device, substantially as hereinbefore described with reference to the accompanying drawings.
49. A vibration sensing package, substantially as hereinbefore described with reference to the accompanying drawings.
- 20 50. A vibration sensing system, substantially as hereinbefore described with reference to the accompanying drawings.
51. A method of manufacturing a vibration sensing device, substantially as hereinbefore described with reference to the accompanying drawings.

Fig.1.

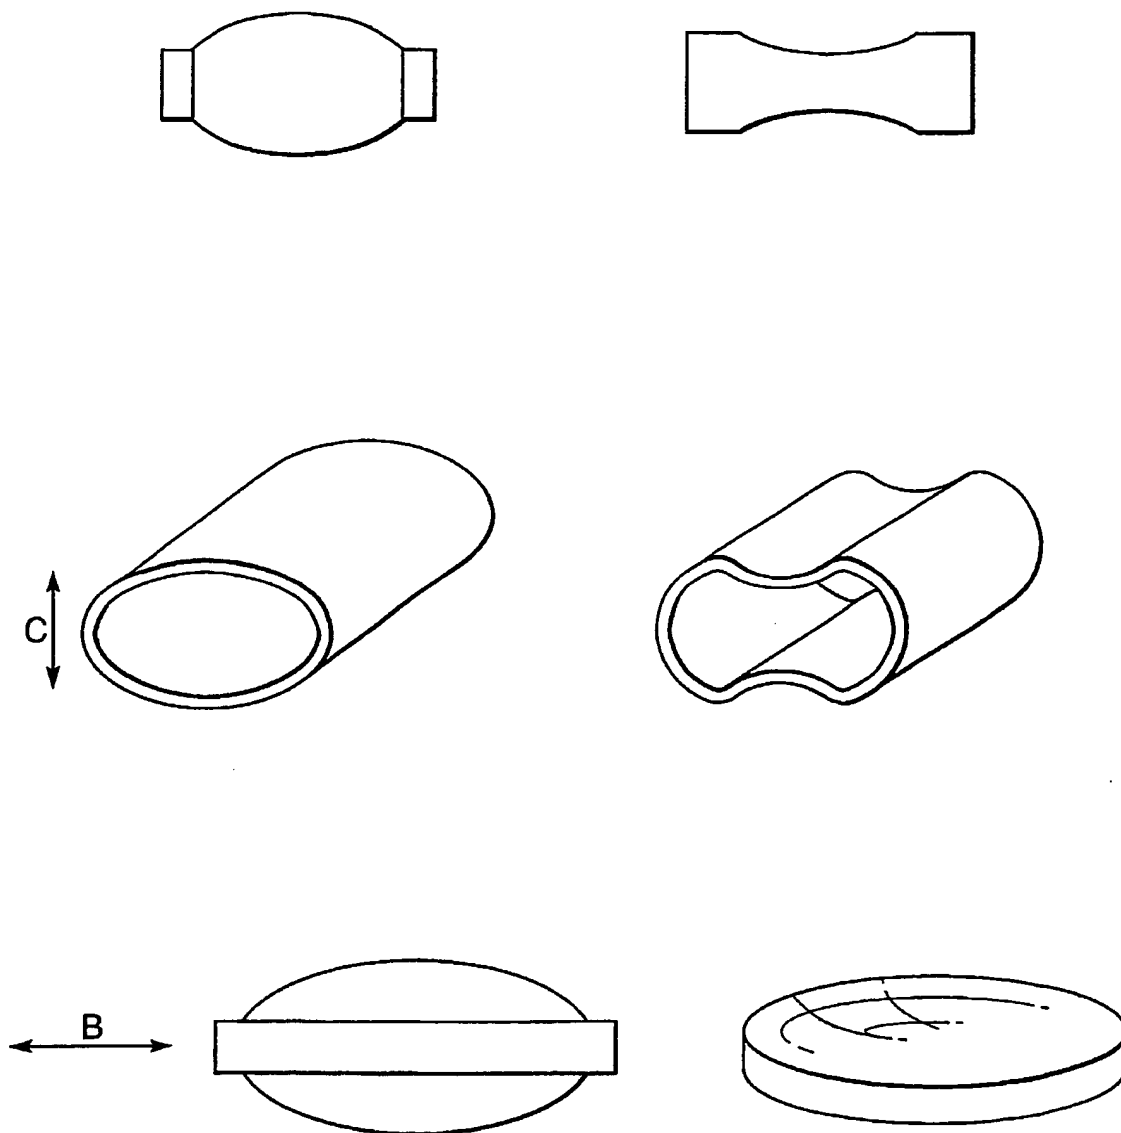


Fig.2A.

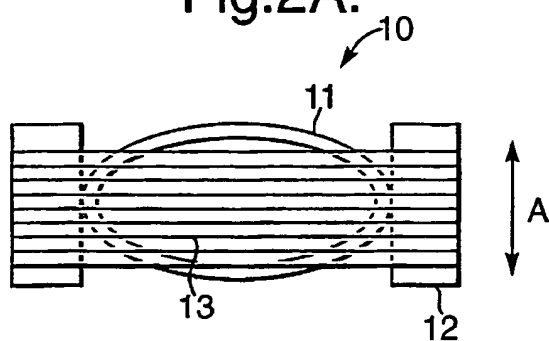


Fig.2B.

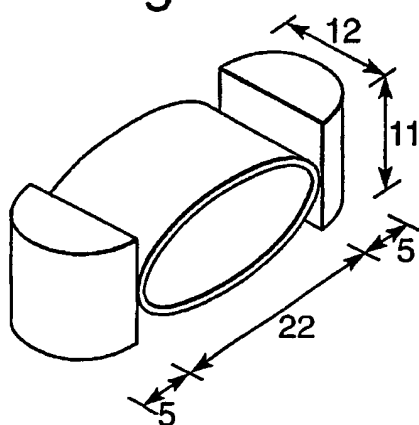


Fig.3.


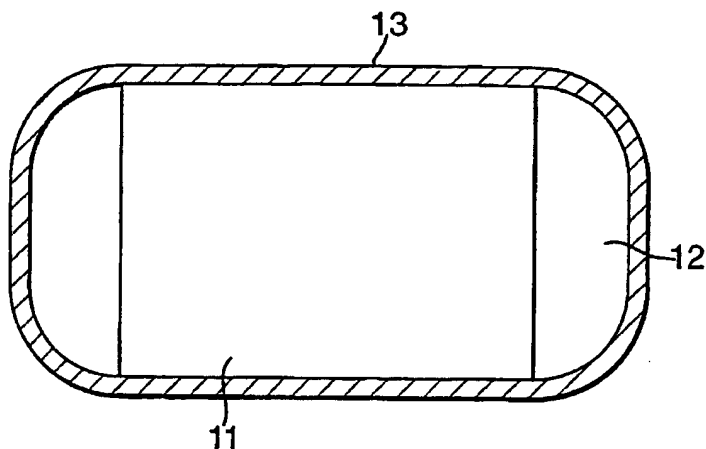


Fig.4.

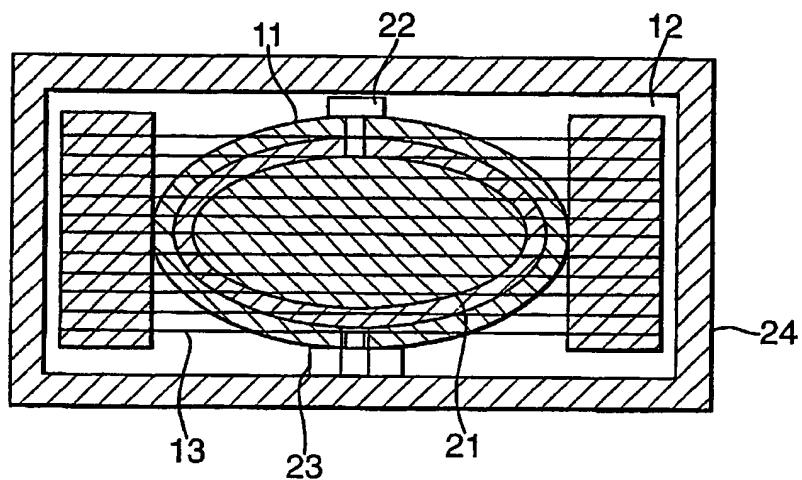

10/533761

4/5

Fig.5.

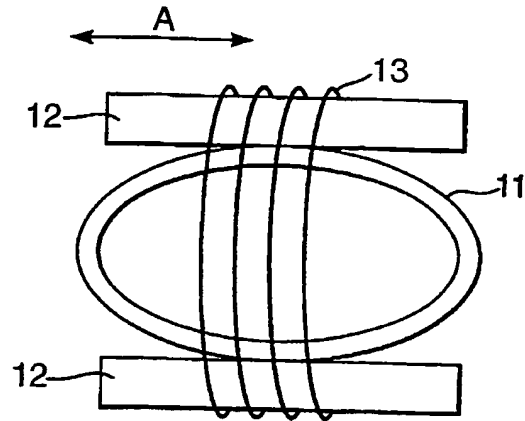


Fig.6.

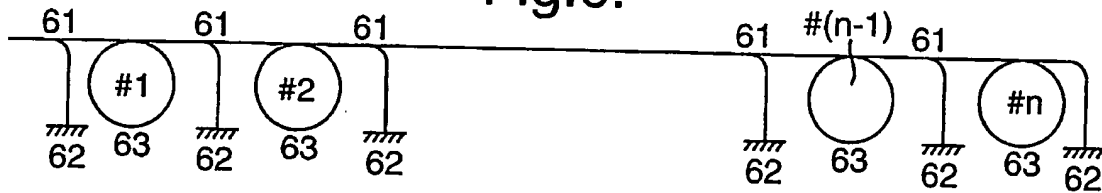
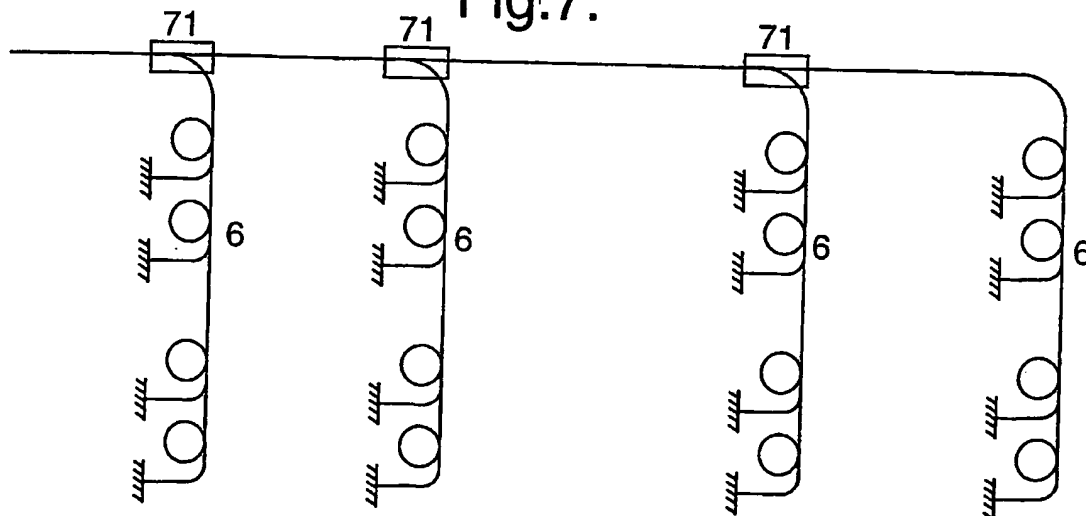


Fig.7.



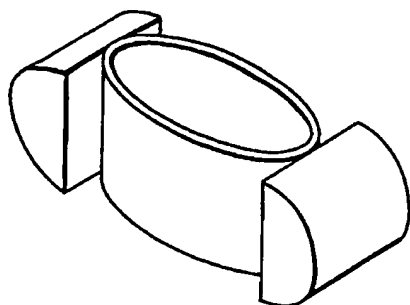


Fig.8.






Fig.9.

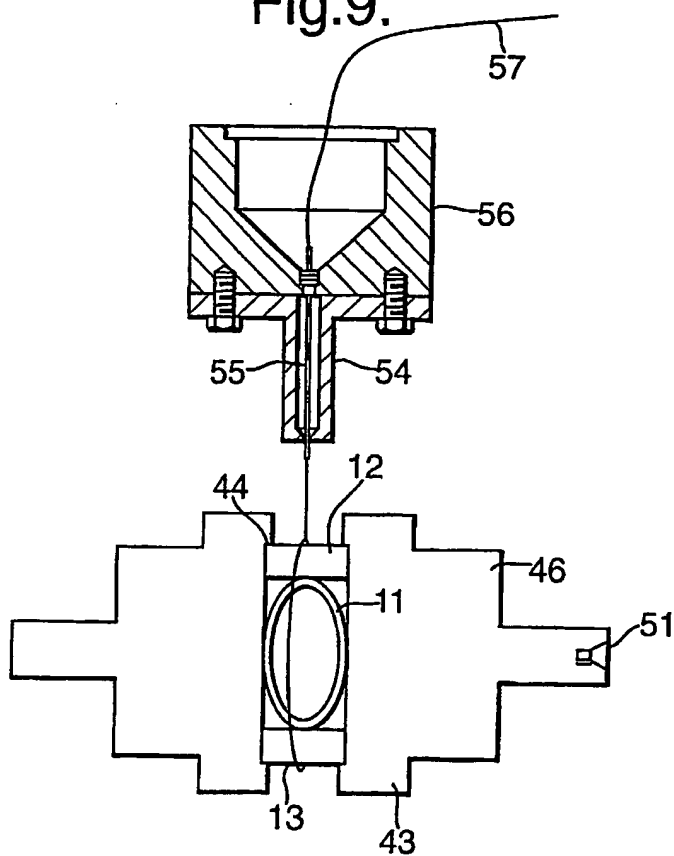

PATENT COOPERATION TREATY

PCT

REC'D 05 MAR 2004

INTERNATIONAL SEARCH REPORT

WIPO PCT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference IP/P7200/WOD	FOR FURTHER ACTION <small>see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.</small>	
International application No. PCT/GB 03/04741	International filing date (day/month/year) 04/11/2003	(Earliest) Priority Date (day/month/year) 08/11/2002
Applicant QINETIQ LIMITED		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 4 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing:

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☐ the text is approved as submitted by the applicant.

☒ the text has been established by this Authority to read as follows:

FLEXTENSIONAL VIBRATION SENSOR

5. With regard to the **abstract**,

☐ the text is approved as submitted by the applicant.

☒ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No. 4

☒ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

☐ None of the figures.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 03/04741

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 G01V1/18 G10K9/12 G01H9/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 G01V G10K G01H		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, PAJ		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 951 271 A (GARRETT STEVEN L ET AL) 21 August 1990 (1990-08-21) column 1, line 34 - line 37 column 2, line 19 - line 47 column 3, line 33 - line 45 column 3, line 65 - column 4, line 10 column 4, line 36 - column 5, line 8 figure 1	1-43, 48-50
A	---	44-47, 51
X	US 5 212 670 A (BROWN DAVID A) 18 May 1993 (1993-05-18) column 1, line 59 - column 2, line 1 column 3, line 16 - line 27 column 4, line 61 - line 66 column 5, line 40 - line 58 figure 1	1-43, 48-50

	--/--	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents: *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *G* document member of the same patent family		
Date of the actual completion of the international search 26 February 2004		Date of mailing of the international search report 08/03/2004
Name and mailing address of the ISA European Patent Office, P.B. 5018 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer Schneiderbauer, K

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 03/04741

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DANIELSON D A ET AL: "FIBER-OPTIC ELLIPSOIDAL FLEXTENSIONAL HYDROPHONES" JOURNAL OF LIGHTWAVE TECHNOLOGY, IEEE. NEW YORK, US, vol. 7, no. 12, 1 December 1989 (1989-12-01), pages 1995-2002, XP000103658 ISSN: 0733-8724 page 1996, right-hand column; figure 1 page 2000, left-hand column -page 2001, right-hand column ---	1-43, 48-50
X	US 2001/022757 A1 (XU QI-CHANG ET AL) 20 September 2001 (2001-09-20) page 1, paragraph 4 page 1, paragraphs 9,10 page 3, paragraph 56 -page 4, paragraph 57 page 5, paragraph 63 figures 1,4 ---	1,36
X	CA 2 007 096 C (ALLIED SIGNAL INC) 19 July 1996 (1996-07-19) page 1, line 13 - line 18 page 4, line 10 - line 19 page 5, line 2 - line 5 figures 1,2 ---	1,36
A	WO 01 12345 A (ENGDAHL GOERAN ;HYMAG G ENGDAHL (SE)) 22 February 2001 (2001-02-22) page 1, line 22 - line 24 page 6, line 11 - line 14 page 9, line 12 - line 24 figure 1 ---	1,4,7
A	PATENT ABSTRACTS OF JAPAN vol. 018, no. 530 (P-1809), 6 October 1994 (1994-10-06) -& JP 06 180995 A (MIYAZAKI OKI ELECTRIC CO LTD;OTHERS: 01), 28 June 1994 (1994-06-28) abstract; figure 1 -----	1,36

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 03/04741

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4951271	A	21-08-1990	NONE	
US 5212670	A	18-05-1993	NONE	
US 2001022757	A1	20-09-2001	US 6278658 B1 EP 1039444 A2	21-08-2001 27-09-2000
CA 2007096	C	19-07-1996	CA 2007096 A1	19-07-1996
WO 0112345	A	22-02-2001	SE 514569 C2 AU 5861800 A EP 1202820 A1 NO 20020371 A WO 0112345 A1 SE 9902894 A	12-03-2001 13-03-2001 08-05-2002 10-04-2002 22-02-2001 14-02-2001
JP 06180995	A	28-06-1994	NONE	